Warning	Warning
ELECTRICAL SHOCK HAZARD. Turn off power at the main service panel by removing the fuse or switching the appropriate circuit breaker to the off position before removing or installing any thermostat.	This thermostat must be installed only by a professional contractor familiar with air conditioning and heating systems controls and wiring. Install only on 24V AC control systems

Robertshaw 9610

INTEGRATED COMFORT SOLUTIONS

DIGITAL PROGRAMMABLE THERMOSTAT

(E) ELECTRIC (G) GAS

7 Day Programmable
1 Heat / 1 Cool

Affordable Comfort Control

The Robertshaw 9610 programmable thermostat is the perfect solution to keeping your home comfortable year-round. Not only that, setting back your thermostat twice each day can reduce energy costs up to 25%. **Set it and save.** Today's busy lifestyle demands hands-free temperature control, and with a programmable thermostat, you've got it. In QuickSet™ mode, set seven daily programs for summer and winter all at once. Individual days can be customized to match any lifestyle. You will always come home to a comfortable setting, and you'll save energy without even thinking about it.

The 9610 is compatible with all standard 24 Volt AC heating and cooling systems, including single stage heat pump systems.

When you select a Robertshaw thermostat, you've made the choice of an industry partner that's been making quality products for 100 years. Come home to affordable comfort. Come home to Robertshaw™.

Features and Benefits

Automatic Compressor Short Cycle Protection
A system safeguard. Reduces wear and tear of HVAC equipment.

7 Day Programming
Seven separate daily programs with four time and temperature changes per day allow maximum flexibility.

QuickSet™
Allows 7 days to be programmed all at once.

Adjustable Temperature Differential
Maintains optimal customer comfort.

Temporary Program Override
Allows for manual temperature adjustment.

Low Temperature Protection
Heat turns on when temperature goes below 40°F. Protects pipes from freezing.

Toll-Free Assistance
Toll-Free Technical Service number printed right on

http://www.thermostatsales.com

Toll-Free Technical Service number printed right on the thermostat provides immediate assistance.
O & B Terminals
Greater system flexibility, zoning compatible.
Quick Wire Terminal Block
Fast and easy installation. Uses sturdy wire clamps — no wrap-around of screws.

Technical service available:
1-800-345-8299
M-F 7:30 a.m. – 5:30 p.m. CST

UL

FIVE YEAR WARRANTY **5**

Click here to purchase

Robertshaw®
INTEGRATED COMFORT SOLUTIONS™

9610
DIGITAL PROGRAMMABLE THERMOSTAT

(E) (G)
ELECTRIC GAS

7 Day Programmable
1 Heat / 1 Cool

Terminal Designations

| (Rh) | (Rc) | (W) | (Y) | (O) | (B) | (G) |

- Rc → 24 VAC Cooling Transformer
- Y → Cooling Relay
- B → Heat Active Reversing Valve
- Rh → 24 VAC Heating Transformer
- W → Heating Relay
- O → Cool Active Reversing Valve
- G → Fan Relay

THE ROBERTSHAW 9610 REPLACES:

Maple Chase	09610
Robertshaw	300-625
White-Rodgers Company*	1F72, 1F72W, 1F76, 1F80-24
Honeywell, Inc.*	T8000C, T8001C, T8132C, T8112C

* Verify specific application requirements before substitution.
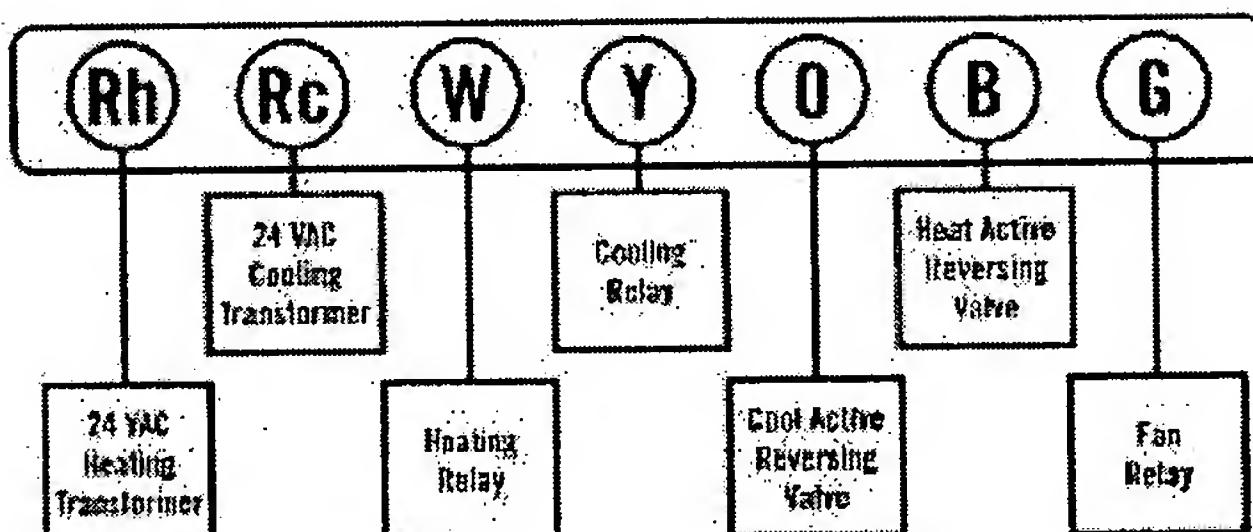
Specifications

Electrical rating: 24 Volt AC (18-30 VAC)
1 amp maximum load per terminal
3 amp total maximum load (all terminals combined)
Temperature control range: 45°- 90°F (7°- 32°C)
Accuracy: +/-1°F (+/-.5°C)
DC power: 3.0 VDC (2 "AA" alkaline batteries included)
System configurations: 2-7 wire single stage gas, oil or electric systems (including single stage heat pump systems)
Terminations: Rh, Rc, W, Y, B, O, G

Shipping Information

Indiv. Ctn. Dim.:	6.75" x 4.375" x 1.625"
Master Ctn. Qty.:	6
Master Ctn. Dim.:	9.25" x 5.625" x 7.625"
Master Ctn. Cu. Ft.:	0.23
Master Ctn. Wt.:	4.0 lbs.
Max. Pallet Qty.:	1170
Max. Pallet Dim.:	40" x 48" x 48"
Max. Pallet Cu. Ft.:	53.33
Max. Pallet Wt.:	835 lbs.

Other Single-Stage Heat / Cool
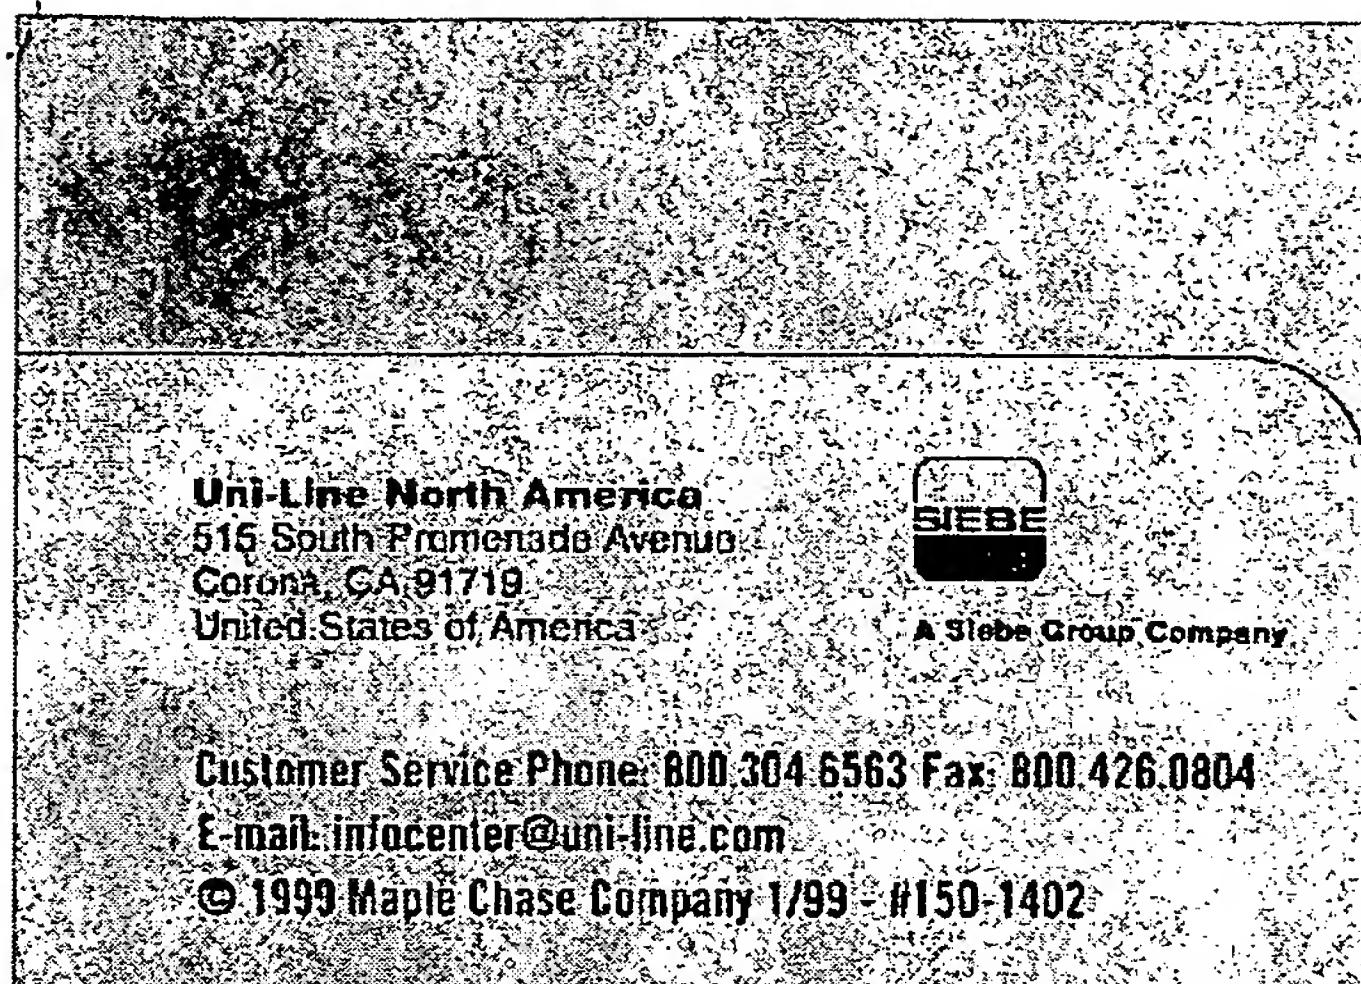
Other Single-Stage Heat / Cool Thermostats

9100: Mercury-Free Mechanical
9200: Mercury-Free Deluxe Mechanical
9500: Digital, Non-Programmable
9600: Programmable 5-2 Day
9700: Deluxe Programmable 7 Day

Uni-Line North America
515 South Promenade Avenue
Corona, CA 91719
United States of America

SIEBE
A Siebe Group Company

Customer Service Phone: 800.304.6563 Fax: 800.426.0804
E-mail: infocenter@uni-line.com
© 1999 Maple Chase Company 1/99 #150-1402

Distributed by:

http://www.thermostatsales.com

Other thermostats to check out
9500
9505
9520
9600
9610
9620
9701i
9715i
9720i

High resolution PDF format data sheets below.
9701i
9715i
9720i

Warning
ELECTRICAL SHOCK HAZARD. Turn off power at the main service panel by removing the fuse or switching the appropriate circuit breaker to the off position before removing or installing any thermostat.

Warning
This thermostat must be installed only by a professional contractor familiar with air conditioning and heating systems controls and wiring.
Install only on 24V AC control systems

Back to D&H Climate Control